


Micro Precision 5-Series Speakercable

5-Series Speakercable 2.5 sqmm / AWG 13

Made in Germany under Micro-Precision specification. Speakercable is an important part of the signal path. Signalpath should be always clean and low loss. Inductance and capacity should be low for best transportation of small details. This cable is based on physical rules.

1. OFC copper core.
2. Silver outer core. Resistance is $< > 10\%$ below copper specification.
3. Prevent Skin Effect by extreme thin, outer 264x0.07mm silverwire mesh. Please do not compare with tinned wires because of the same „look“...
4. Big distance between the positive and negative core to prevent loss by capacity.
5. „Meter printing“ on cable to read / calculate length easily.
6. Matte black isolation always looks great after install.
7. High Quality gold plated OFC crimp sleeves and bananaplug available.

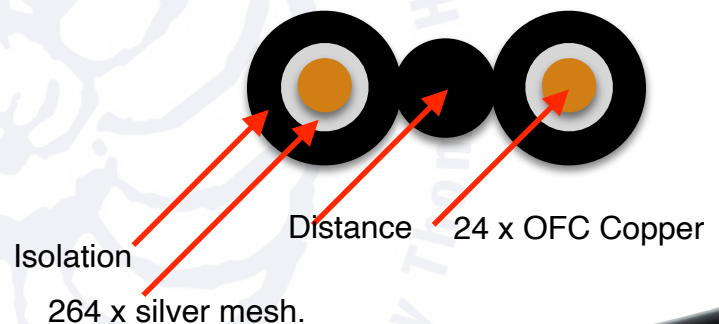

Technical Data

Height total	185 mm	DC-Resistance	0,00648 Ω / Meter
Outer Diameter	275 mm	Inner Core	24 x OFC-CU
Inner Diameter	33 mm	Outer Core	264 x Silverwire
Weight	9.4 kG	Area	2.5 sqmm
QTY	100 Meter	AWG	13
		DCR / 100 m	0,6486 Ω